
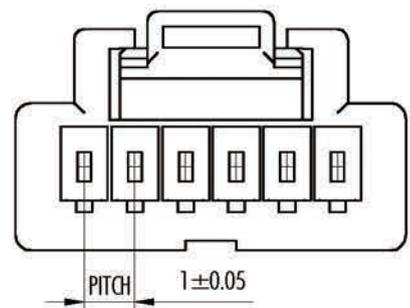
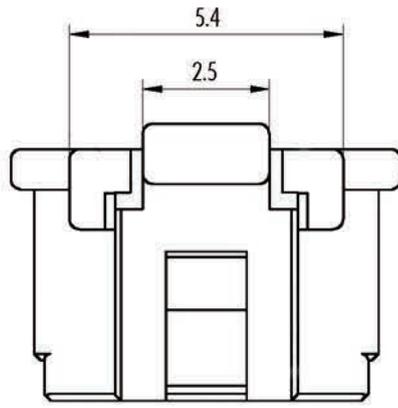
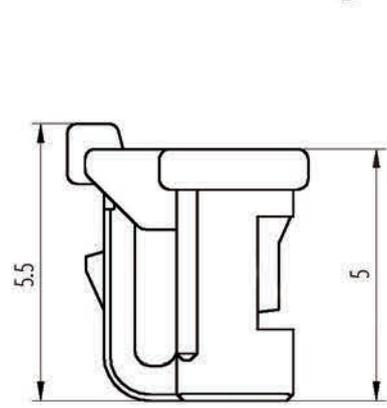
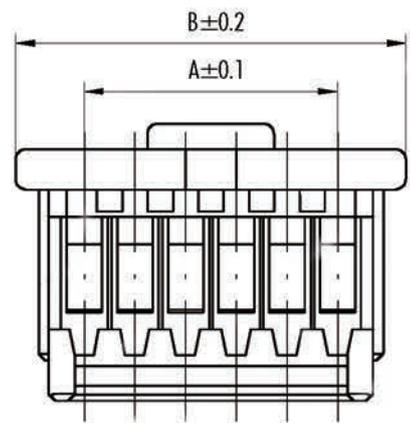
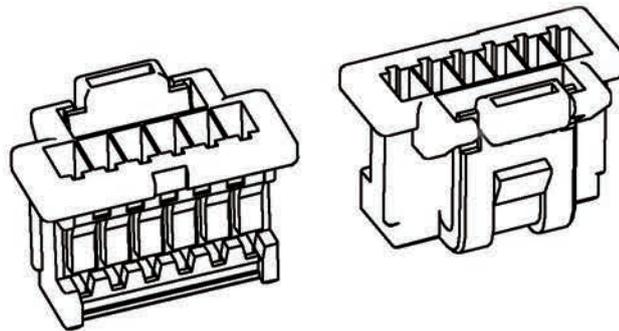


**SPECIFICATIONS**

- 1、Current Rating: 1A AC, DC
- 2、Voltage Rating: 50V AC, DC
- 3、Temperatuer Range: -25℃~+85℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 100MΩ Min
- 6、Withstanding Voltang: 500V AC/minute
- 7、Material:Nylon 66 UL94-V0(2)

编 号	尺寸 (mm)	
	A	B
A1005H-2P	1.00	3.70
A1005H-3P	2.00	4.70
A1005H-4P	3.00	5.70
A1005H-5P	4.00	6.70
A1005H-6P	5.00	7.70
A1005H-7P	6.00	8.70
A1005H-8P	7.00	9.70
A1005H-9P	8.00	10.70
A1005H-10P	9.00	11.70
A1005H-11P	10.00	12.70
A1005H-12P	11.00	13.70

制图 DRAWN	变更内容 DESCRIPTION	日期 DATE	GENERAL TOLERANCE		制图 Mapping	料号 PART NO.	A1005H-XXP		版本 REV.	A								
			X.±0.25	X.'±2'			审核 Audit	品名 TITLE			页次 SHEET	1/1						
			.X±0.20	.X'±1'									核准 Approved	客户料号 CUTM. NO.				
			.XX±0.15	.XX'±0.5'											单位 Units	MM	比例 SCALE	1:1
			.XXX±0.10	.XXX'±0.5'														



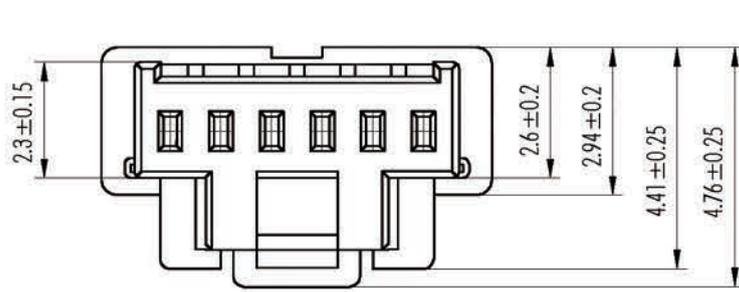


**SPECIFICATIONS**



- 1、Current Rating: 1A AC, DC
- 2、Voltage Rating: 50V AC, DC
- 3、Temperatuer Range: -25℃~+85℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 100MΩ Min
- 6、Withstanding Voltang: 500V AC/minute
- 7、Material: Nylon 66 UL-94V0(2)

编 号	尺寸 (mm)	
	A	B
A1005H-2P带扣	1.00	3.70
A1005H-3P带扣	2.00	4.70
A1005H-4P带扣	3.00	5.70
A1005H-5P带扣	4.00	6.70
A1005H-6P带扣	5.00	7.70
A1005H-7P带扣	6.00	8.70
A1005H-8P带扣	7.00	9.70
A1005H-9P带扣	8.00	10.70
A1005H-10P带扣	9.00	11.70
A1005H-11P带扣	10.00	12.70
A1005H-12P带扣	11.00	13.70

制图 DRAWN	变更内容 DESCRIPTION	日期 DATE	GENERAL TOLERANCE		制图 Mapping	料号 PART NO.	A1005H-XXP带扣		版本 REV.	A								
			X.±0.25	X.*±2*			审核 Audit	品名 TITLE			页次 SHEET	1/1						
			.X±0.20	.X*±1*									核准 Approved	客户料号 CUTM. NO.				
			.XX±0.15	.XX*±0.5*											单位 Units	MM	比例 SCALE	1:1
			.XXX±0.10	.XXX*±0.5*														

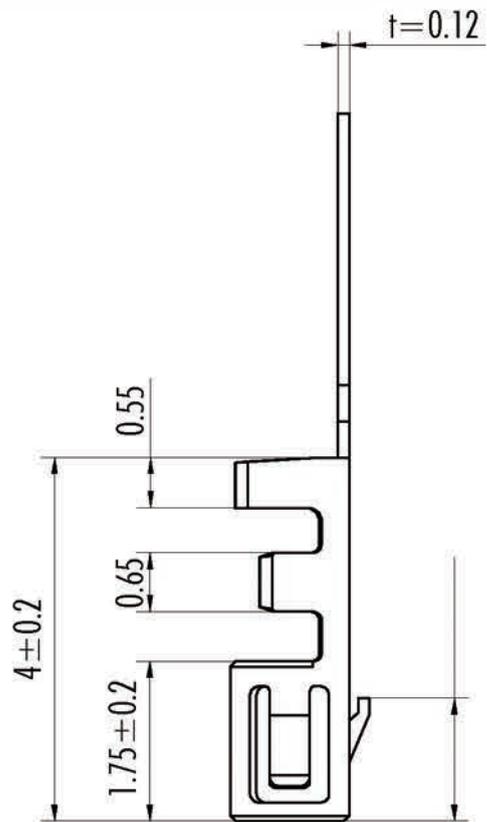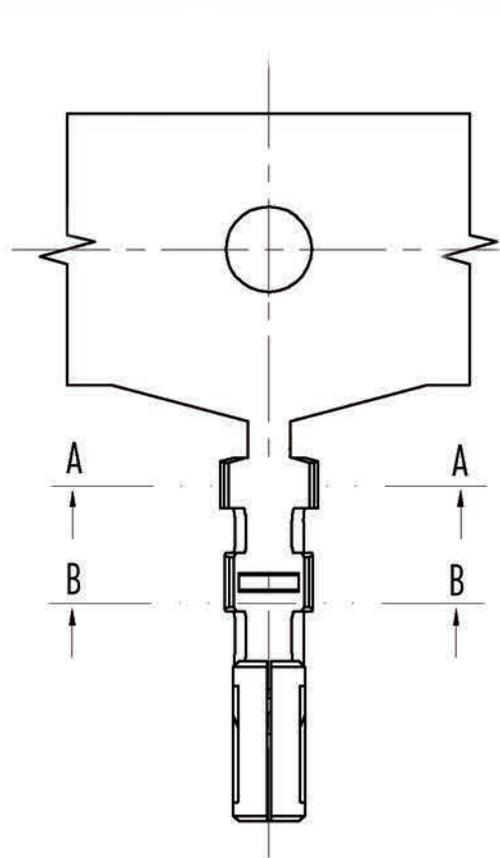

SECTION A-A


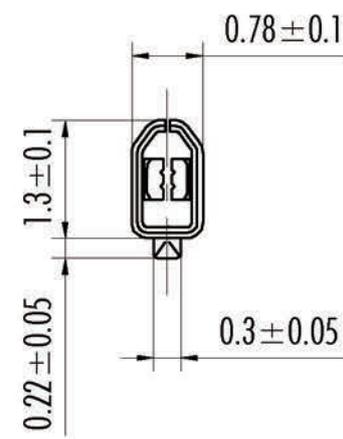



SPECIFICATIONS



- 1、 Current Rating: 1A AC, DC
- 2、 Voltage Rating: 50V AC, DC
- 3、 Temperatuer Range: -25°C ~ +85°C
- 4、 Contact Resistance: 20mΩ Max
- 5、 Insulation Resistance: 100MΩ Min
- 6、 Withstanding Voltang: 500V AC/minute
- 7、 Material: Phosphoric copper Tin-plated
- 8、 Applicable Wire Sizes: AWG#32-28#

制图 DRAWN	变更内容 DESCRIPTION	日期 DATE	GENERAL TOLERANCE		制图 Mapping	审核 Audit	核准 Approved	单位 Units	MM	比例 SCALE	1:1
			X.±0.25	X.'±2'							
			.X±0.20	.X'±1'							
			.XX±0.15	.XX'±0.5'							
			.XXX±0.10	.XXX'±0.5'							

料号 PART NO.	A1005-TP	版本 REV.	A
品名 TITLE		页次 SHEET	1/1
客户料号 CUTM. NO.			
<b>深圳市德益连接器有限公司</b> SHENZHEN DEYI CONNECTORS CO., LTD.			

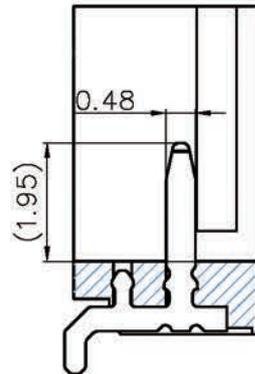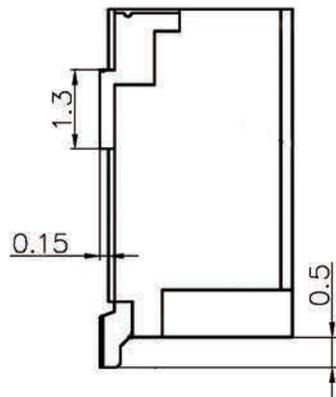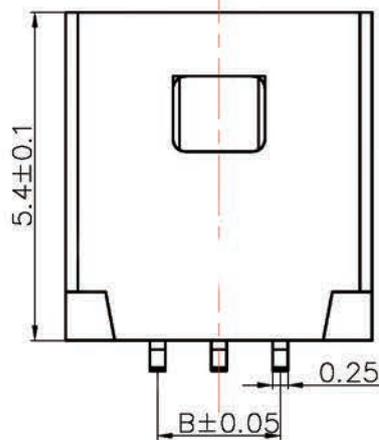


SECTION A-A

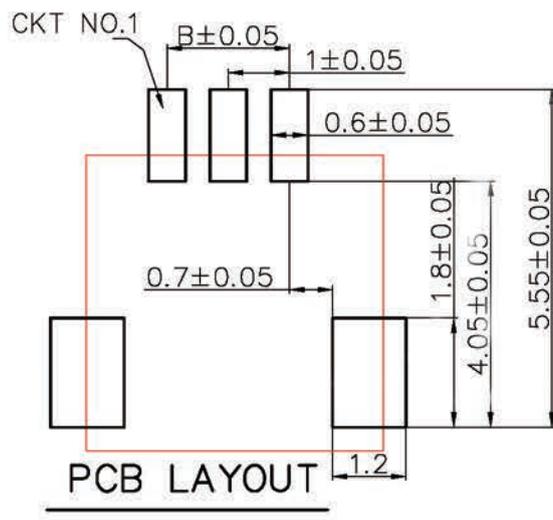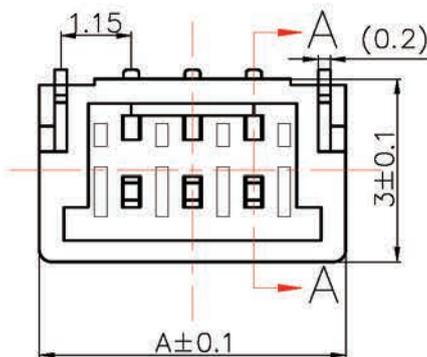






SPECIFICATIONS

- 1、Current Rating: 1A AC, DC
- 2、Voltage Rating: 50V AC, DC
- 3、Temperatuer Range: -25°C~+85°C
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 100MΩ Min
- 6、Withstanding Voltang: 500V AC/minute
- 7、Material:LCP,UL94V-0

编号	尺寸 (mm)	
	A	B
A1005WR-S-2P	4.00	1.00
A1005WR-S-3P	5.00	2.00
A1005WR-S-4P	6.00	3.00
A1005WR-S-5P	7.00	4.00
A1005WR-S-6P	8.00	5.00



制图 DRAWN	变更内容 DESCRIPTION	日期 DATE	GENERAL TOLERANCE		制图 Mapping	料号 PART NO.	版本 REV.	A
			X.±0.25	X.'±2'				
			.X±0.20	.X'±1'	审核 Audit	A1005WR-S-XXP		1/1
			.XX±0.15	.XX'±0.5'	核准 Approved	品名 TITLE		
			.XXX±0.10	.XXX'±0.5'	单位 Units	客户料号 CUTM. NO.		
					MM	比例 SCALE		
						1:1	深圳市德益连接器有限公司 SHENZHEN DEYI CONNECTORS CO., LTD.	

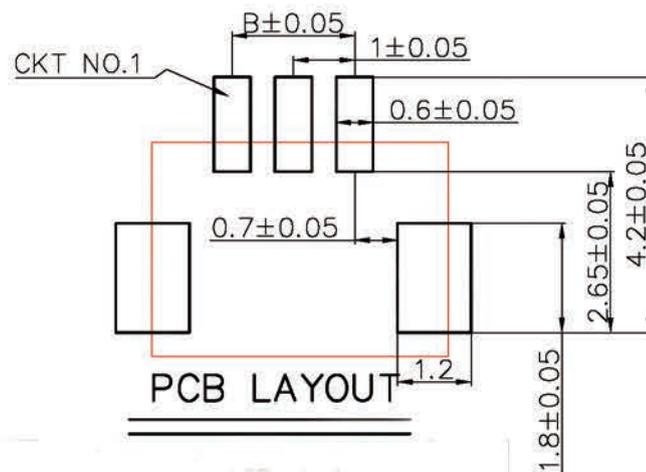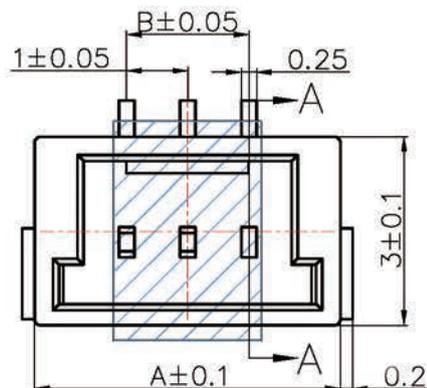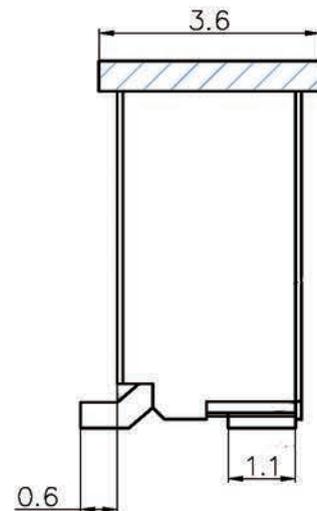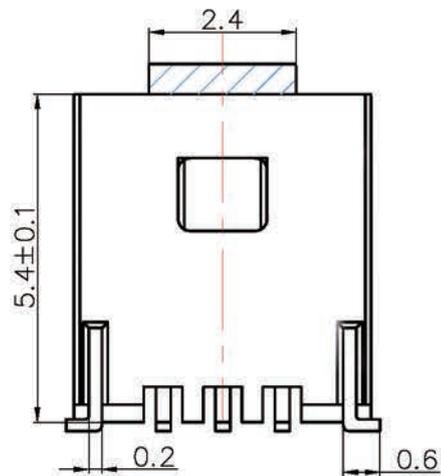

### SPECIFICATIONS

- 1、Current Rating: 1A AC, DC
- 2、Voltage Rating: 50V AC, DC
- 3、Temperatuer Range: -25℃~+85℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 100MΩ Min
- 6、Withstanding Voltang: 500V AC/minute
- 7、Material:LCP,UL94V-0

编号	尺寸 (mm)	
	A	B
A1005WV-S-2P	4.00	1.00
A1005WV-S-3P	5.00	2.00
A1005WV-S-4P	6.00	3.00
A1005WV-S-5P	7.00	4.00

制图 DRAWN	变更内容 DESCRIPTION	日期 DATE	GENERAL TOLERANCE		制图 Mapping	料号 PART NO.	A1005WV-S-XXP	版本 REV.	A
			X.±0.25	X.*±2°					
			.X±0.20	.X*±1°	审核 Audit	品名 TITLE		页次 SHEET	1/1
			.XX±0.15	.XX*±0.5°	核准 Approved	客户料号 CUTM. NO.			
			.XXX±0.10	.XXX*±0.5°	单位 Units				
					MM	比例 SCALE	1:1		

深圳市德益连接器有限公司  
SHENZHEN DEYI CONNECTORS CO., LTD.